

# CPE10000 Indoor



GPP Release 10



MIMO - LTE 4x4



Data Speed -  
300Mbps Download  
50Mbps Upload





802.11/b/g/a/ac



Web GUI



AES,WPA, WPA2, TKIP

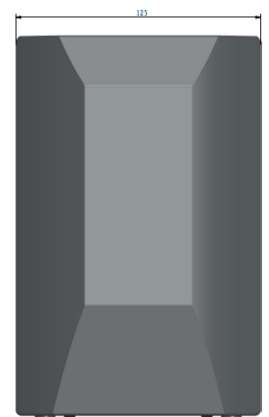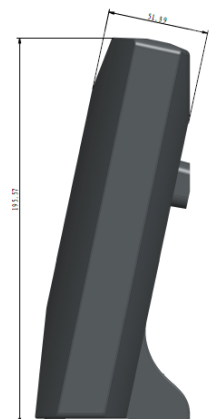

## Specifications

### LTE Interface

<b>Standard Compliance</b>	3GPP TD-LTE Release 10
<b>UE Category</b>	Cat 6
<b>Data Speed</b>	300Mbps DL, 50Mbps UL
<b>Management</b>	USIM Management LTE System Information Display Firmware Upgrade through HTTP TR069
<b>MIMO</b>	4x4
<b>Carrier Aggregation</b>	2XCCDL
<b>USIM</b>	3.3V or 1.8V Push-push socket
<b>Configuration</b>	Web GUI

### Wi-Fi Interface

<b>Radio Access</b>	802.11 b/g/a/ac
<b>Antenna</b>	3 dBi built-in antenna
<b>WLAN/LAN Mode</b>	Up to 32 Users / 4xGiga RJ45
<b>Security</b>	AES, WPA, WPA2 - 64 bits WEP, 128 bits WEP

### CPE Specifications

<b>Dimensions (HxWxD)</b>	195.5 x 12.5 x 51 mm
<b>Color</b>	Black
<b>User Interface</b>	Power Switch 4xGiga Switch Reset Key
<b>Power Source</b>	12V
<b>Environmental</b>	Indoor
<b>Operating Temperature</b>	-10° to 50° C
<b>Humidity</b>	5% - 95%